LifeSmart云起

流光开关

LS240系列 流光开关PRO
LS230系列 流光开关Lite
使用说明书 V1.0

产品介绍

LifeSmart 流光开关系列支持双向通信及手机远程控制，通过手机可以随时随地控制智能开关并查看智能开关状态，从而控制与它连接的每个电器设备，同时可以和其他智能设备（如动态感应器，智慧插座等）形成联动。

流光开关创新地将 LED 灯光元素融入其中，用户可以自定义开关灯效，解决摸黑开关等的难题。同时流光开关可以直接取代传统开关面板，不仅可以通过物理按键开关灯光，还可以使用手机 App 控制，形成双控。


规格参数

尺寸	露出墙外尺寸：86*86*11mm 整机尺寸(1/2/3联开关)：86*86*36mm 整机尺寸(大功率开关)：86*86*37.5mm
静态功率	PRO：<0.6W　　Lite：<1.5W
输入	220V~ 50/60Hz
负载	1/2/3联开关：1-500W/路　1-200W/路 大功率开关：最大20A
无线协议	CoSS
无线距离	200m（开放场）
工作温度	-5~45°C
工作湿度	5~90%

接线指导

1/2/3联开关

L3: 接出的第三路火线
L2: 接出的第二路火线
L1: 接出的第一路火线
L: 接入的火线
N: 接入的零线

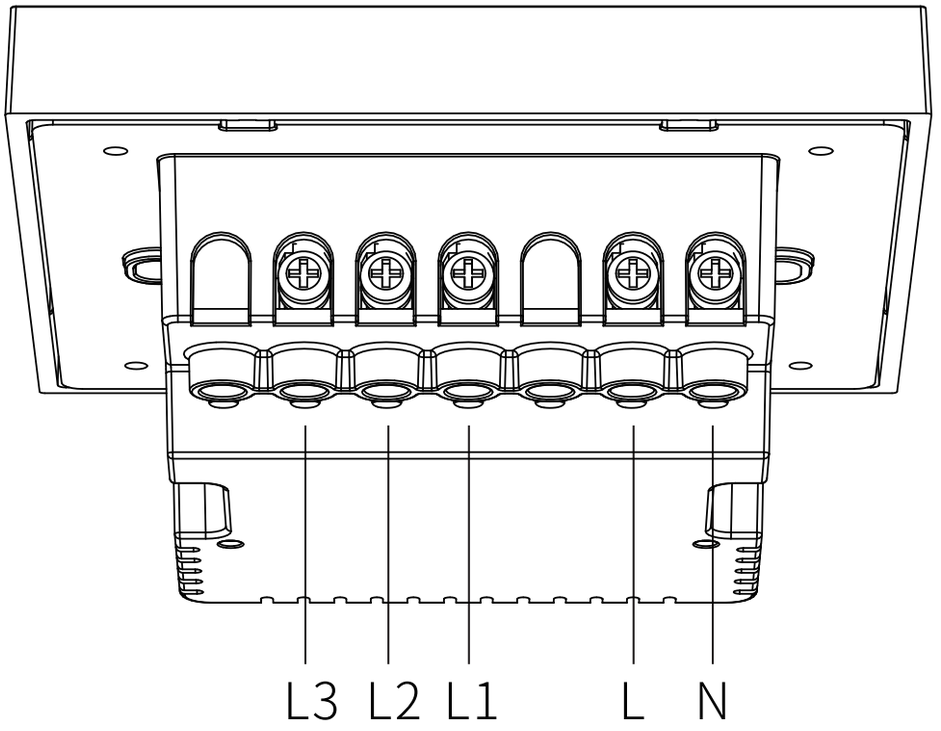

注意：

接出线路数量根据不同的底部套件而变化，请以实物为准。

建议安装高度不超过2米。

本产品在实际安装使用时，需在工作回路上配套有相应规格的过电流保护装置（如：带过电流保护的剩余电流动作断路器），将故障电流限制在10A内。


警告：

因为安装涉及到强电，务必请专业电工操作 。

请严格遵守负载功率限制，并控制流光开关PRO每路用电器数量不超过16个，流光开关Lite每路用电器数量不超过4个。

接线指导

大功率开关

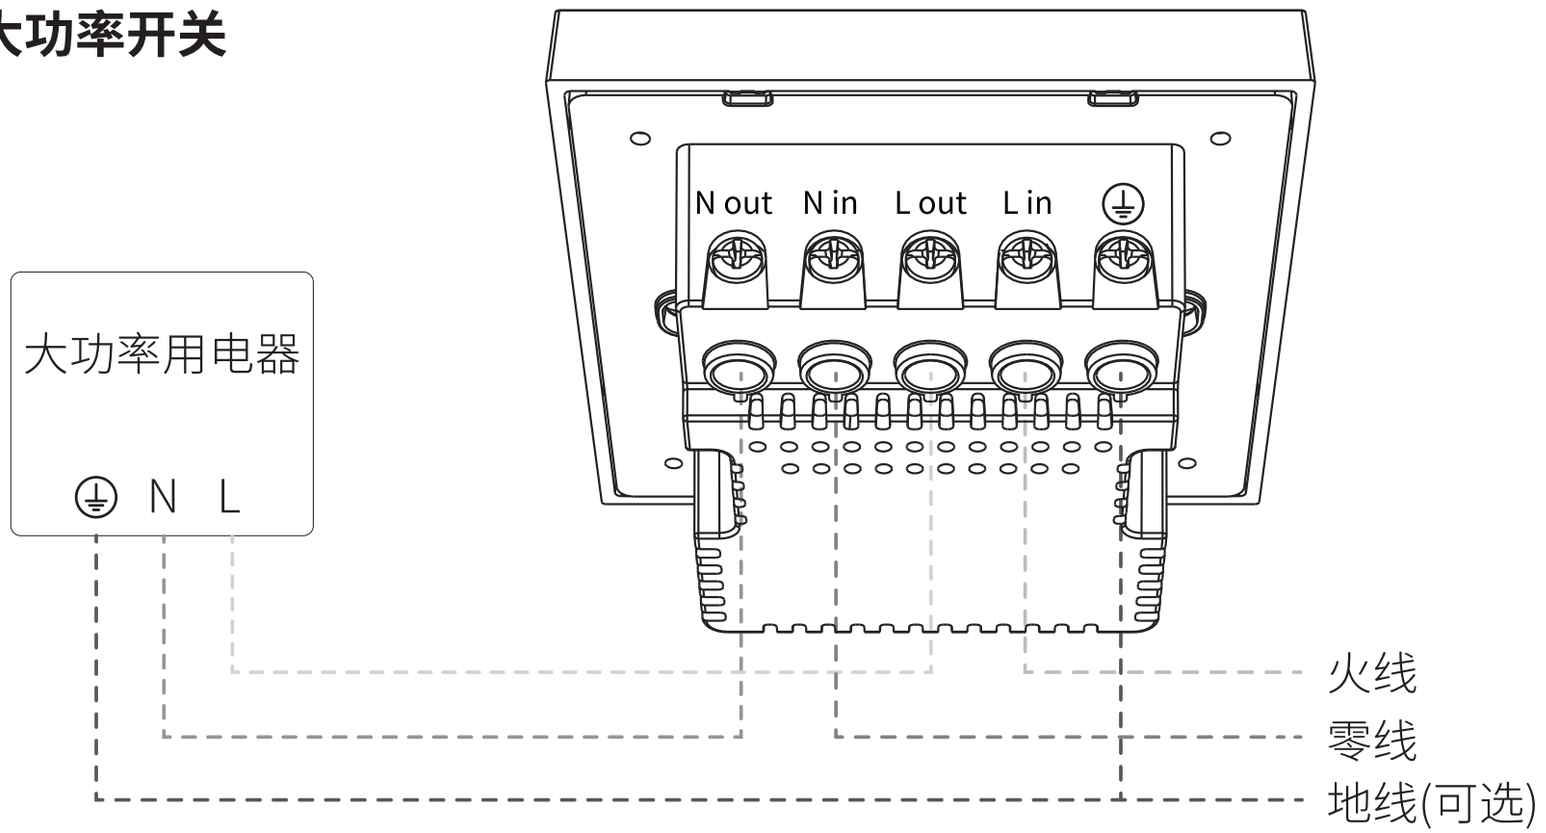

注意：

建议安装高度不超过2米。

本产品在安装使用时，需在工作回路上配套有相应规格的过电流保护装置(如：带过电流保护的剩余电流动作断路器)，根据实际用电负载情况限制故障电流。最大不超过20A。

警告：

因为安装涉及到强电，务必请专业电工操作 。


请严格遵守负载功率限制，并控制每路用电器数量不超过16个。

安装方法

① 切断安装处的电源，确认所接电线未带电。

② 取出智能控制底部套件，进行接线。

③ 将安装的电线有序地理进开关底盒，安放好底部套件，并使用左右两侧的螺丝固定。

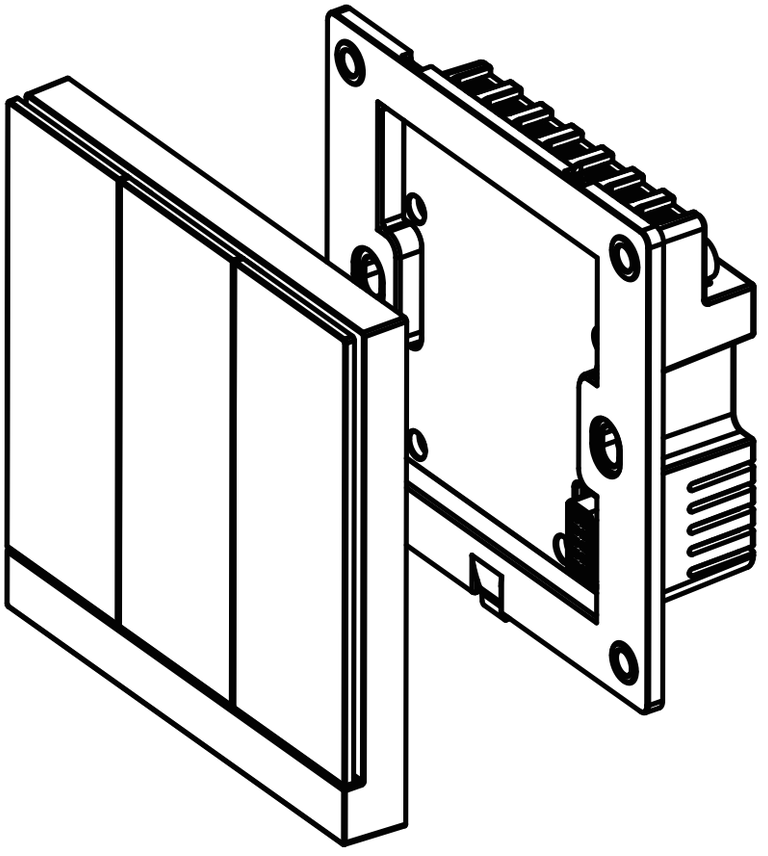

④ 取出开关面板，将面板扣到底部套件上， 确认上、下各两个卡扣到位，否则可能因为接触不良无法正常使用。

⑤ 打开安装处的电源，设备自动开启。

⑥ 配置好智慧中心，在 LifeSmart App 中点击“添加新设备”，选择“流光开关 PRO”或“流光开关 Lite”，参照 App 提示进行操作并完成配对。

* 产品外观请以实物为准

声明

由于产品版本升级或其他原因，本手册内容有可能变更。我们公司保留在没有任何通知或者提示的情况下对本手册的内容进行修改的权利。本手册仅作为使用指导，我们尽全力在本手册中提供准确的信息，但是我们并不确保手册内容完全没有错误，本手册中的所有陈述、信息和建议也不构成任何明示或暗示的担保。

如需要获取最新手册，请登录 **www.ilifesmart.com**

LifeSmart为杭州行至云起科技有限公司的商标。对于本手册中出现的其它公司的商标、产品标识及商品名称，由各自权利人拥有。未经本公司书面许可，任何单位和个人不得擅自摘抄、复制本书内容的部分或全部，并不得以任何形式传播。

技术支持

技术支持电话
400-886-1911

技术支持微信公众号
iLifeSmart

用户支持邮箱
support@ilifesmart.com

网址
www.ilifesmart.com

制造商: 杭州行至云起科技有限公司
地址: 杭州市萧山区平澜路518号悦盛国际中心22楼

保修说明

感谢您购买LifeSmart产品。为了保障您的权益，请仔细阅读以下内容：根据国家三包政策规定，本公司的产品保修期为一年（自购买之日起计算，无法核实购买日期的，以出厂日期为准）。 在保修期内，凡属于正常使用情况下产品本身质量问题引起的故障本公司将给予免费保修。寄送保修前您可以拨打 400-886-1911 与我们的售后人员取得联系。

保修说明

凡有以下情况之一者，不属于免费保修范围。

- 未按照使用说明书要求安装、使用、维护、保管导致的产品故障或损害的；
- 已经超出保修期限的；
- 擅自涂改、撕毁产品条形码；
- 擅自改动本身固有的配置文件或擅自拆机修理；
- 人为导致产品损害，例如输入不合适电压，高温，进水，机械损坏，摔坏，产品严重氧化或生锈等；
- 因不可抗拒力如地震、火灾、水灾、电击等导致的产品故障或损坏；
- 其他非产品本身设计、技术、制造、质量等问题而导致的故障或损坏。

杭州行至云起科技有限公司及其许可者版权所有，保留一切权利。 P/N 88010340 A3

LifeSmart

BLEND Switch

User Guide V1.0

Model: LS230,LS240 series

INSTRUCTION

The LifeSmart BLEND Switch Series replaces your traditional switch with smart home technology to make your life easier.

Combined with the LifeSmart Smart Station and the free LifeSmart App, you have infinite control possibilities.

In addition to traditional switch control of your lights and switched outlets, you can choose combination controls over all of your LifeSmart Smart Home products.

The decorative LED lights on LifeSmart BLEND Switch are customizable via the mobile app, which makes it easier to turn on or off lights in the dark.

SPECIFICATIONS

Size	Outside the wall: 86*86*11mm Overall(1/2/3 way switch): 86*86*36mm Overall(heavy duty switch): 86*86*37.5mm
Power consumption	PRO: <0.6W Lite: <1.5W
Input	AC 100-240V~ 50/60Hz
Maximum load	1/2/3 way switch: resistive load 500W/channel inductive/capacitive load 200W/channel Heavy duty switch: resistive 20A Max Max resistive load = input voltage x 20A
Wireless protocol	CoSS
Wireless distance	200m(open field)
Operating temperature	-5~45°C
Operating humidity	5~90%

WIRING INSTRUCTION

1/2/3 Way Switch


L3: Switch-out Live Wire 3

L2: Switch-out Live Wire 2

L1: Switch-out Live Wire 1

L: Switch-in Live Wire

N: Switch-in Neutral Wire

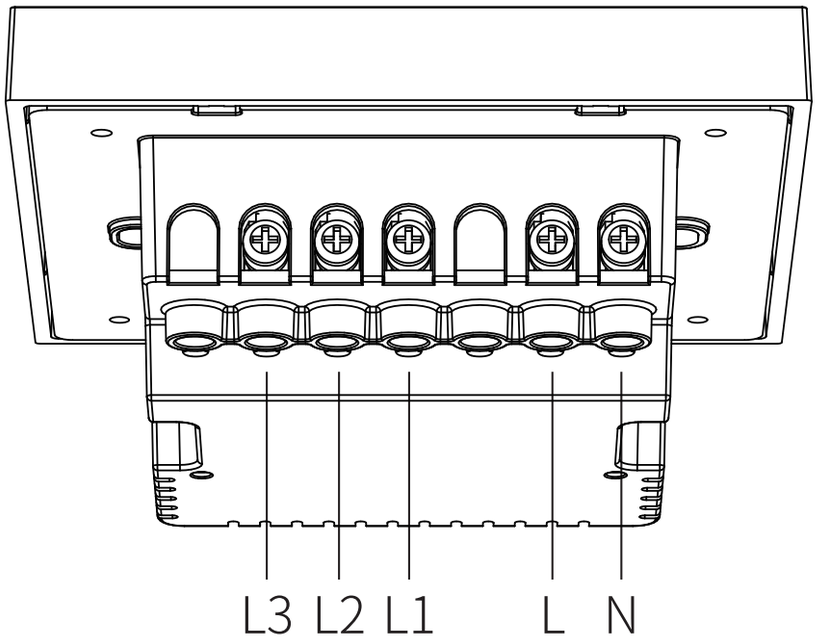

Note

The number of output lines varies according to different smart control accessories, please refer tothe actual product.

The installation involves high voltage and should be operated by a professional electrician.


It is recommended that the installation height does not exceed 2 meters.

When this product is actually installed and used, it is necessary to have a correspond ing over-current protection device (such as a residual current-acting circuit breaker with over-current protection) on the working circuit to limit the fault current to 10A or less.

Please strictly observe the load power limits and control the number of appliances per circuit to no more than 16 for BLEND Switch PRO and no more than 4 for BLEND Switch Lite.

WIRING INSTRUCTION

Heavy Duty Switch

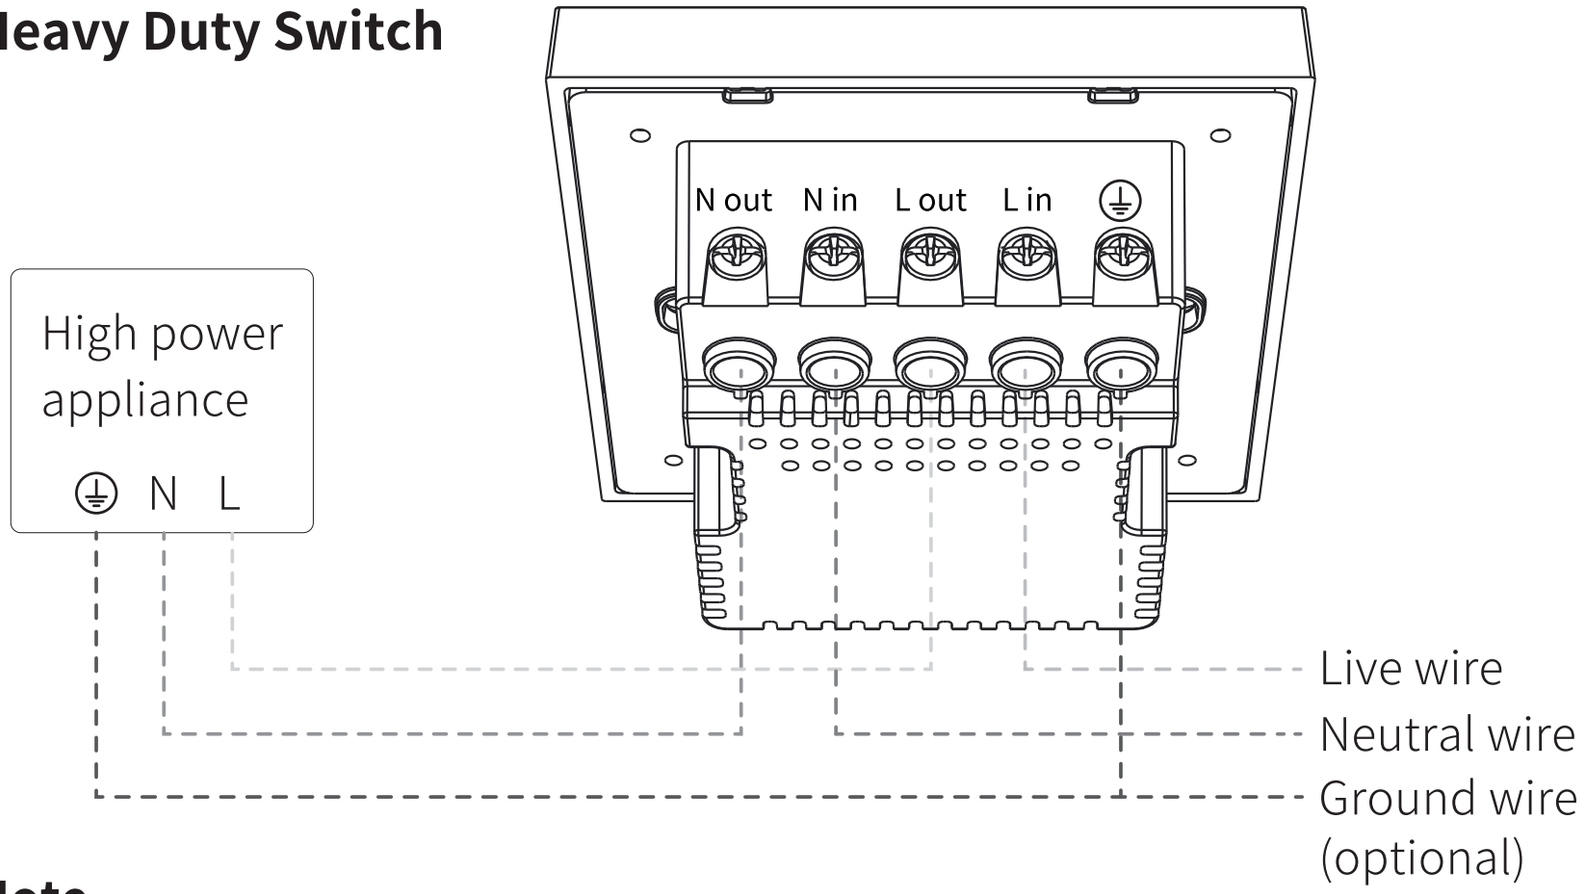

Note

The installation involves high voltage and should be operated by a professional electrician.

It is recommended that the installation height does not exceed 2 meters.

When this product is installed and used, it is necessary to have a corresponding over-current protection device (such as a residual current-acting circuit breaker with over-current protection) on the working circuit to limit the fault current according to the actual power consumption. The maximum does not exceed 20A.

Please strictly observe the load power limits and control the number of appliances per circuit to no more than 16.

INSTALLATION

① Cut off the electrical power supply and make sure the wiring is not charged.

② Take out the smart control accessory and install it according to the wiring instruction, make sure all the wires are placed firmly.


③ Place the wires in the cassette orderly, and fix the smart control accessory to the cassette with fixing screws.

④ Take out the switch panel and fix it to smart control accessory, make sure that the upper and lower two buckles are in place, otherwise it may not be able to be used normally due to poor contact.

⑤ Restore the power supply, the device will turns on automatically.

⑥ After configuration of the Smart Station, choose "**Add Device**" in LifeSmart App, select "**BLEND Switch PRO**" or "**BLEND Switch Lite**" to enter pairing process. Follow the instruction on the app to finish pairing.

*Please refer to the actual product appearance

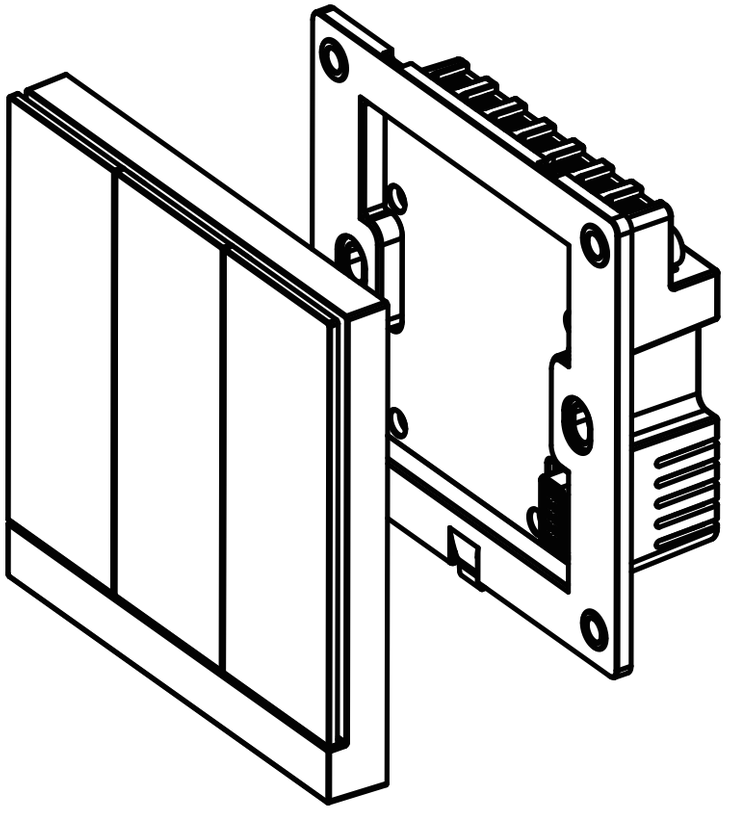

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

User support e-mail address

support@ilifesmart.com

Website

iot.ilifesmart.com

Manufacturer: HANGZHOU LIFESMART TECHNOLOGY CO.,LTD.
Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart APP and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

http://global.ilifesmart.com/ce/docs/

CE

Notice: This device may be used in each member state in EU.

DISPOSAL AND RECYCLE INFORMATION



Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.

Facebook: ilifesmarthome Twitter: ilifesmarthome

Copyright © 2022 LifeSmart Inc. All Rights Reserved.