LifeSmart云起

超能面板™


超能面板PRO 焕新版

LS268系列使用说明书 V1.0

产品介绍

超能面板PRO是一款安装于家庭动线交汇处的智能家居控制面板，同时也是一款多协议融合的智能网关。以标准86底盒尺寸设计，方便您无缝升级。它采用4寸高清触控屏幕，为您提供更宽广的视觉空间。可以通过触摸屏操控家中各种智能设备和智慧场景，例如精准控制窗帘的开关程度，调节灯光亮度和颜色，设定空调温度，一键设置离家、回家场景。让用户的智慧生活，真正实现一触即发。

部件说明

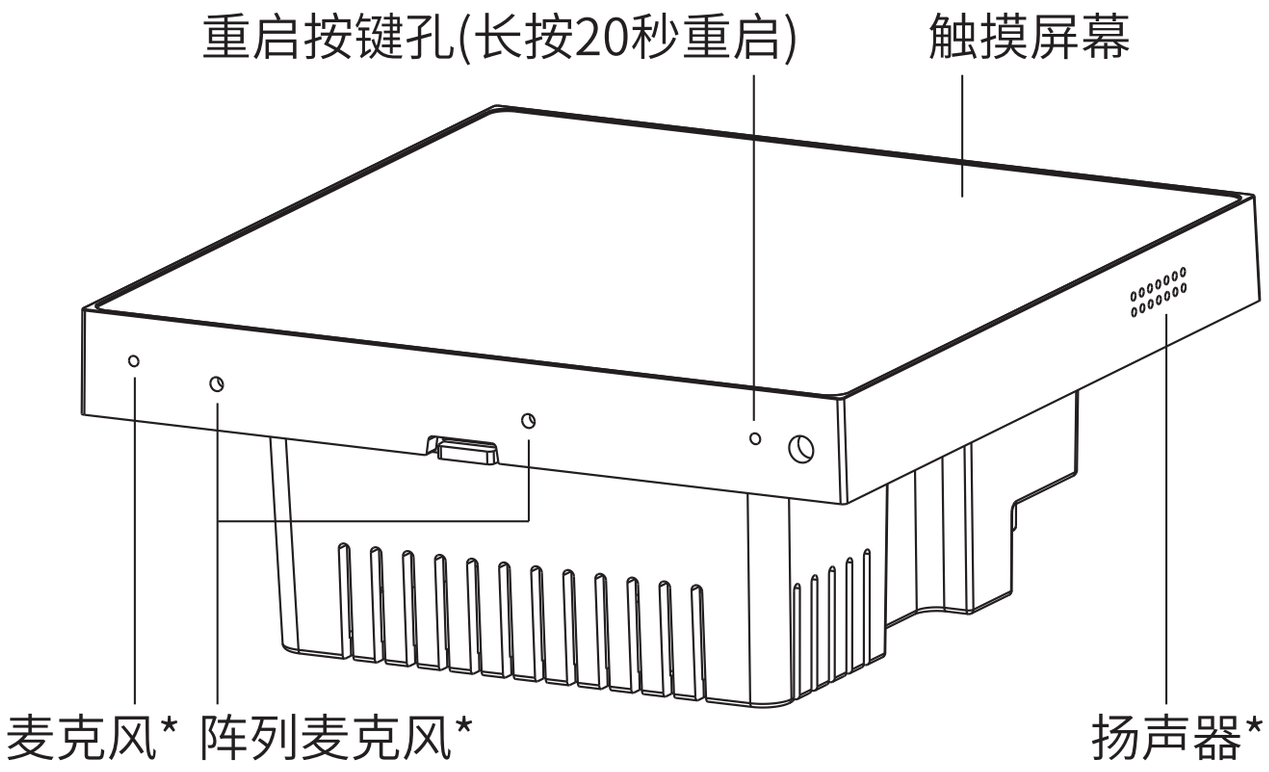

*麦克风、阵列麦克风、扬声器为选配，请以实物为准


规格参数

系统	Linux
触摸屏	480P
通信协议	WiFi / CoSS / ZigBee
通信频率	WiFi: 2.4/5GHz　CoSS: 433MHz GFSK
通信距离	200米 (CoSS开放场)
尺寸	露出墙外尺寸:86*86*11mm 整机尺寸:86*86*36mm
工作温度	-5~45°C
工作湿度	5~90%
电源输入	AC 100-240V 50/60Hz
负载 (搭配开关控制套件)	单路阻性负载最大500W 单路感性、容性负载最大200W

接线指导

搭配开关控制套件

L3: 接出的第三路火线
L2: 接出的第二路火线
L1: 接出的第一路火线
L:　接入的火线
N:　接入的零线

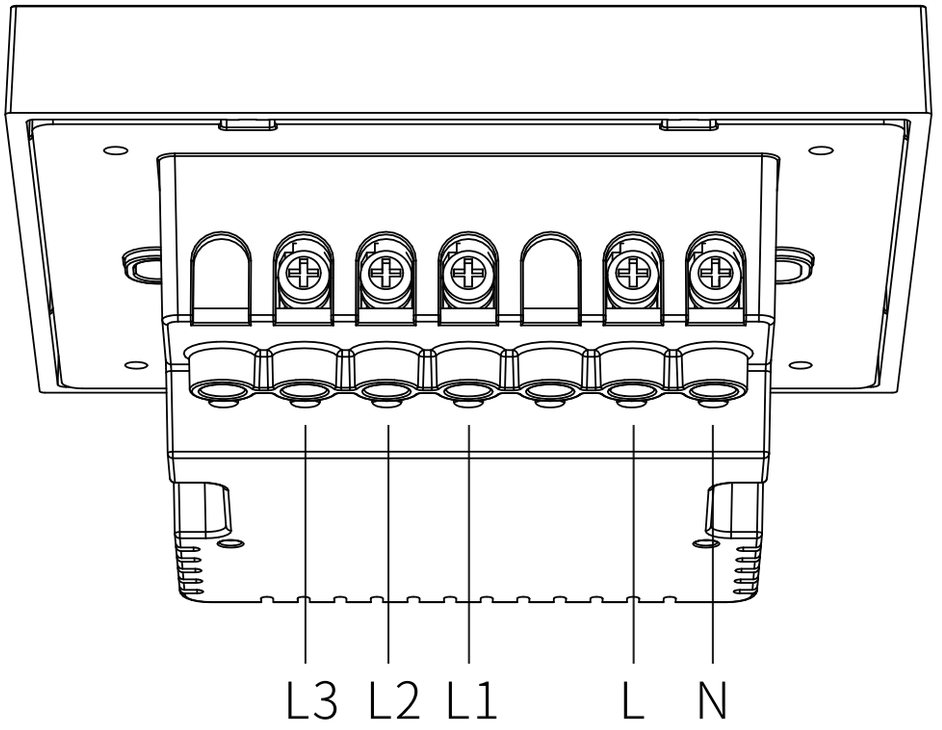

注意：

接出线路数量根据不同的底部套件而变化，请以实物为准。

搭配其他类型的控制套件时，请以控制套件上的接线指导为准。

建议安装高度不超过2米。

本产品在实际安装使用时，需在工作回路上配套有相应规格的过电流保护装置（如：带过电流保护的剩余电流动作断路器），将故障电流限制在10A内。

警告：

因为安装涉及到强电，务必请专业电工操作 。

请严格遵守负载功率限制，并控制每路用电器数量不超过16个。

安装方法


① 切断安装处的电源，确认所接电线未带电。

② 取出智能控制底部套件，进行接线。

③ 将安装的电线有序地理进开关底盒，安放好底部套件，并使用左右两侧的螺丝固定。

④ 取出屏幕套件，将面板扣到底部套件上，确认上、下各两个卡扣到位，否则可能因为接触不良无法正常使用。

⑤ 打开安装处的电源，设备自动开启。

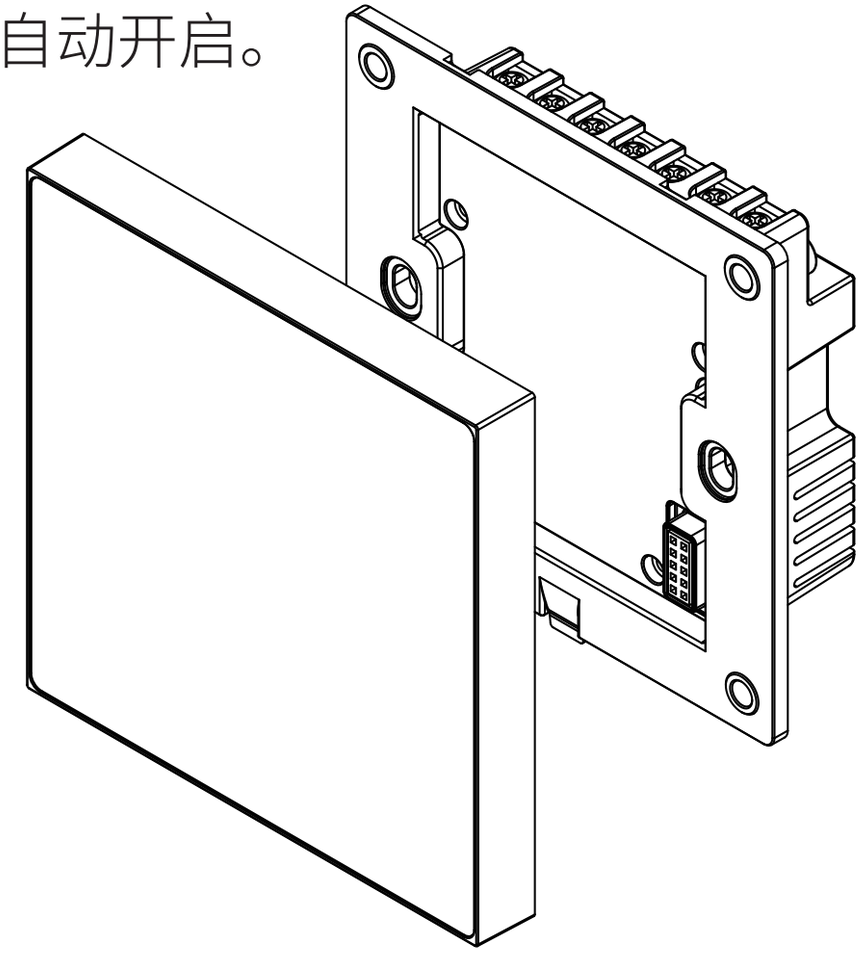

声明

由于产品版本升级或其他原因，本手册内容有可能变更。我们公司保留在没有任何通知或者提示的情况下对本手册的内容进行修改的权利。本手册仅作为使用指导，我们尽全力在本手册中提供准确的信息，但是我们并不确保手册内容完全没有错误，本手册中的所有陈述、信息和建议也不构成任何明示或暗示的担保。

如需要获取最新手册，请登录 **www.ilifesmart.com**

LifeSmart为杭州行至云起科技有限公司的商标。对于本手册中出现的其它公司的商标、产品标识及商品名称，由各自权利人拥有。未经本公司书面许可，任何单位和个人不得擅自摘抄、复制本书内容的部分或全部，并不得以任何形式传播。

技术支持

技术支持电话
400-886-1911

技术支持微信公众号
iLifeSmart

用户支持邮箱
support@ilifesmart.com

网址
www.ilifesmart.com

制造商: 杭州行至云起科技有限公司
地址: 杭州市萧山区平澜路518号悦盛国际中心22楼

保修说明

感谢您购买LifeSmart产品。为了保障您的权益，请仔细阅读以下内容：根据国家三包政策规定，本公司的产品保修期为一年（自购买之日起计算，无法核实购买日期的，以出厂日期为准）。 在保修期内，凡属于正常使用情况下产品本身质量问题引起的故障本公司将给予免费保修。寄送保修前您可以拨打 400-886-1911 与我们的售后人员取得联系。

保修说明

凡有以下情况之一者，不属于免费保修范围。

- 未按照使用说明书要求安装、使用、维护、保管导致的产品故障或损害的；
- 已经超出保修期限的；
- 擅自涂改、撕毁产品条形码；
- 擅自改动本身固有的配置文件或擅自拆机修理；
- 人为导致产品损害，例如输入不合适电压，高温，进水，机械损坏，摔坏，产品严重氧化或生锈等；
- 因不可抗拒力如地震、火灾、水灾、电击等导致的产品故障或损坏；
- 其他非产品本身设计、技术、制造、质量等问题而导致的故障或损坏。

杭州行至云起科技有限公司及其许可者版权所有，保留一切权利。

LifeSmart

Nature Mini PRO

Nature Mini PRO

Setting up your LifeSmart Nature


User Guide V1.0

Model: LS268 series

INSTRUCTION

Nature Mini PRO is a smart home control panel installed at the intersection of moving paths in your home. It has a 4-inch HD touch screen to provide you with a wide visual space and a comfortable interaction experience. With a powerful hardware platform to support multi-mode protocols and a customized operating system, it can transmit control signals to smart home devices and receive status feedback, thus realizing control functions of smart devices such as turning off lights and opening curtains.

ILLUSTRATION

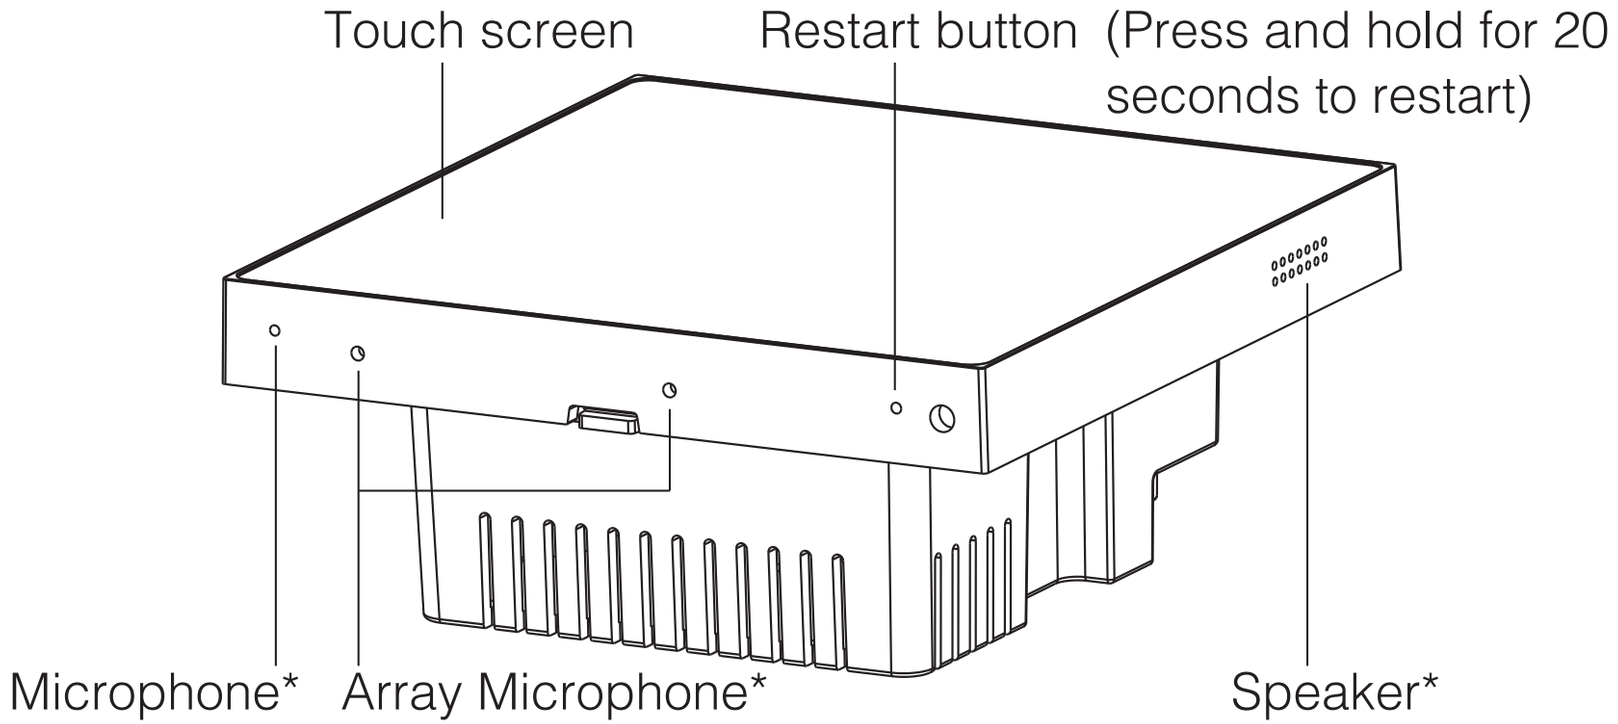

*The microphone, array microphone and speaker are optional, please refer to the actual product.

SPECIFICATIONS

Operation System	Linux
Screen resolution	480x480
Wireless protocol	WiFi, CoSS, Zigbee
Wireless frequency	WiFi: 2.4/5GHz CoSS: 433MHz GFSK
Wireless distance	200m (CoSS open field)
Product size	Outside the wall: 86*86*11mm Overall: 86*86*36mm
Working temperature	-5~45°C
Working humidity	5~90%
Input	AC 100-240V 50/60Hz
Load (working with the switch accessories)	Resistive Load: 500W per channel. Inductive/Capacitive Load: 200W per channel.

WIRING INSTRUCTION

Working with the switch accessories:


L3: Switch-out Live Wire 3

L2: Switch-out Live Wire 2

L1: Switch-out Live Wire 1

L: Switch-in Live Wire

N: Switch-in Neutral Wire

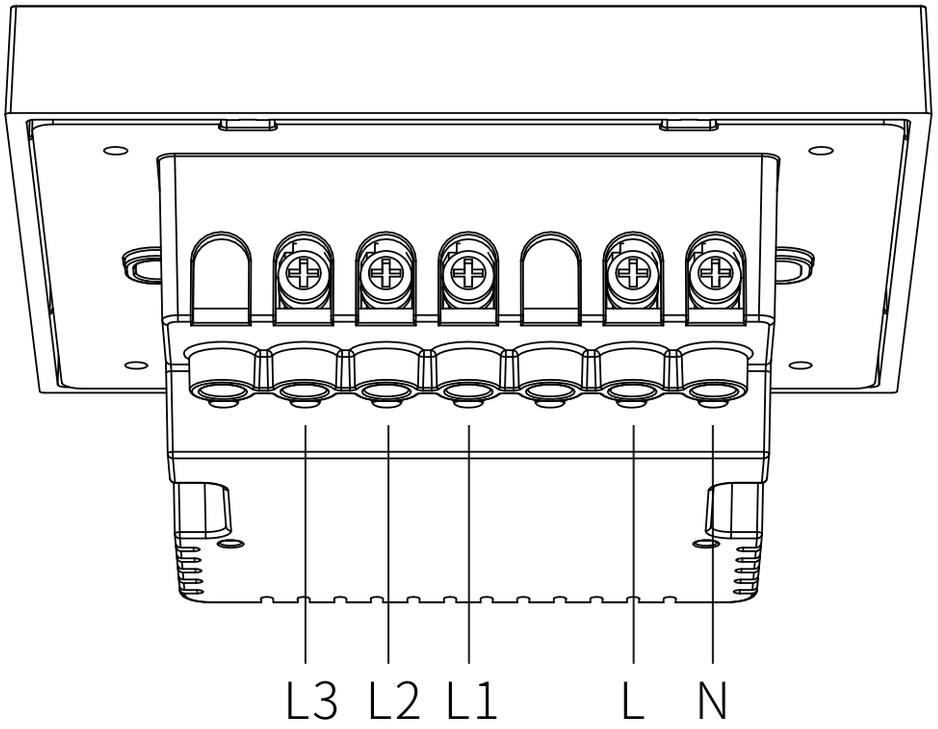

NOTE

- The number of output lines varies according to different smart control accessories, please refer tothe actual product.

- When working with other smart control accessories, please refer the wiring instructions on the accessory.

- The installation involves high voltage and should be done by a professional electrician.

INSTALLATION


① Cut off the electrical power supply and make sure the wiring is not charged.

② Take out the smart control accessory and install it according to the wiring instruction, make sure all the wires are placed firmly.

③ Place the wires in the cassette orderly, and fix the smart control accessory to the cassette with fixing screws.

④ Take out the smart control panel and fix it to smart control accessory, make sure that the upper and lower two buckles are in place, otherwise it may not be able to be used normally due to poor contact.

⑤ Restore the power supply, the device will turns on automatically.

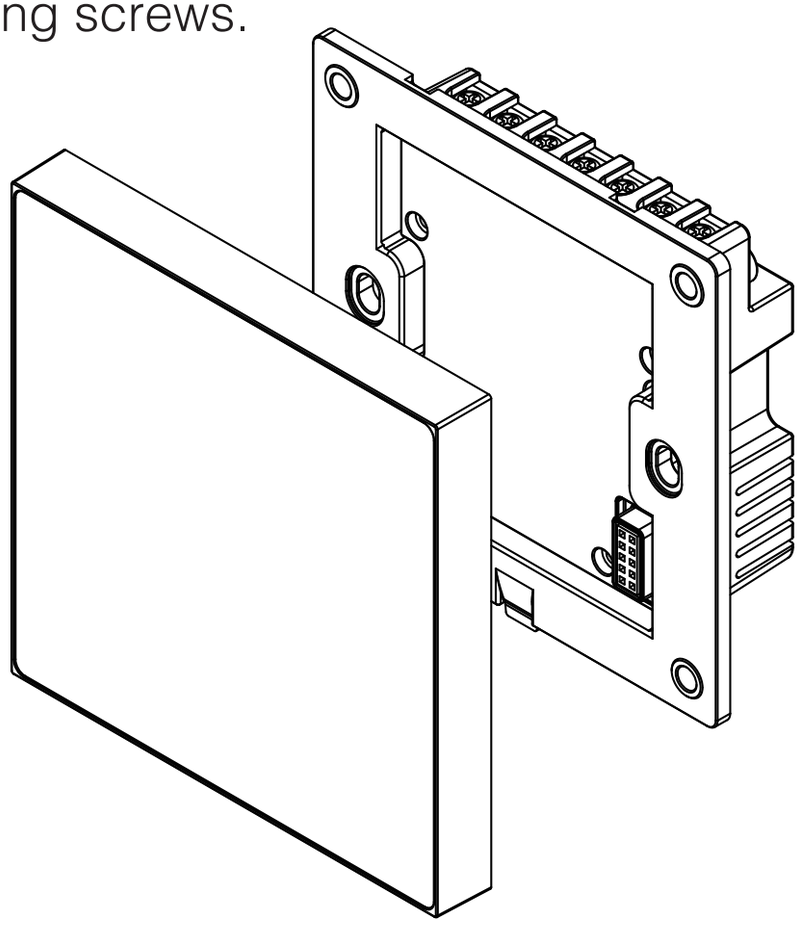

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

User support e-mail address

support@ilifesmart.com

Website

iot.ilifesmart.com

Manufacturer: HANGZHOU LIFESMART TECHNOLOGY CO.,LTD.
Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart APP and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

http://global.ilifesmart.com/ce/docs/

CE

Notice: This device may be used in each member state in EU.

Facebook: ilifesmarthome Twitter: ilifesmarthome

Copyright © 2024 LifeSmart Inc. All Rights Reserved. P/N 88014730 A0