LifeSmart云起


星玉调光开关

(0-10V)

使用说明书 V1.0

适用于LS220-DW2/DG2/DF2等

产品图示

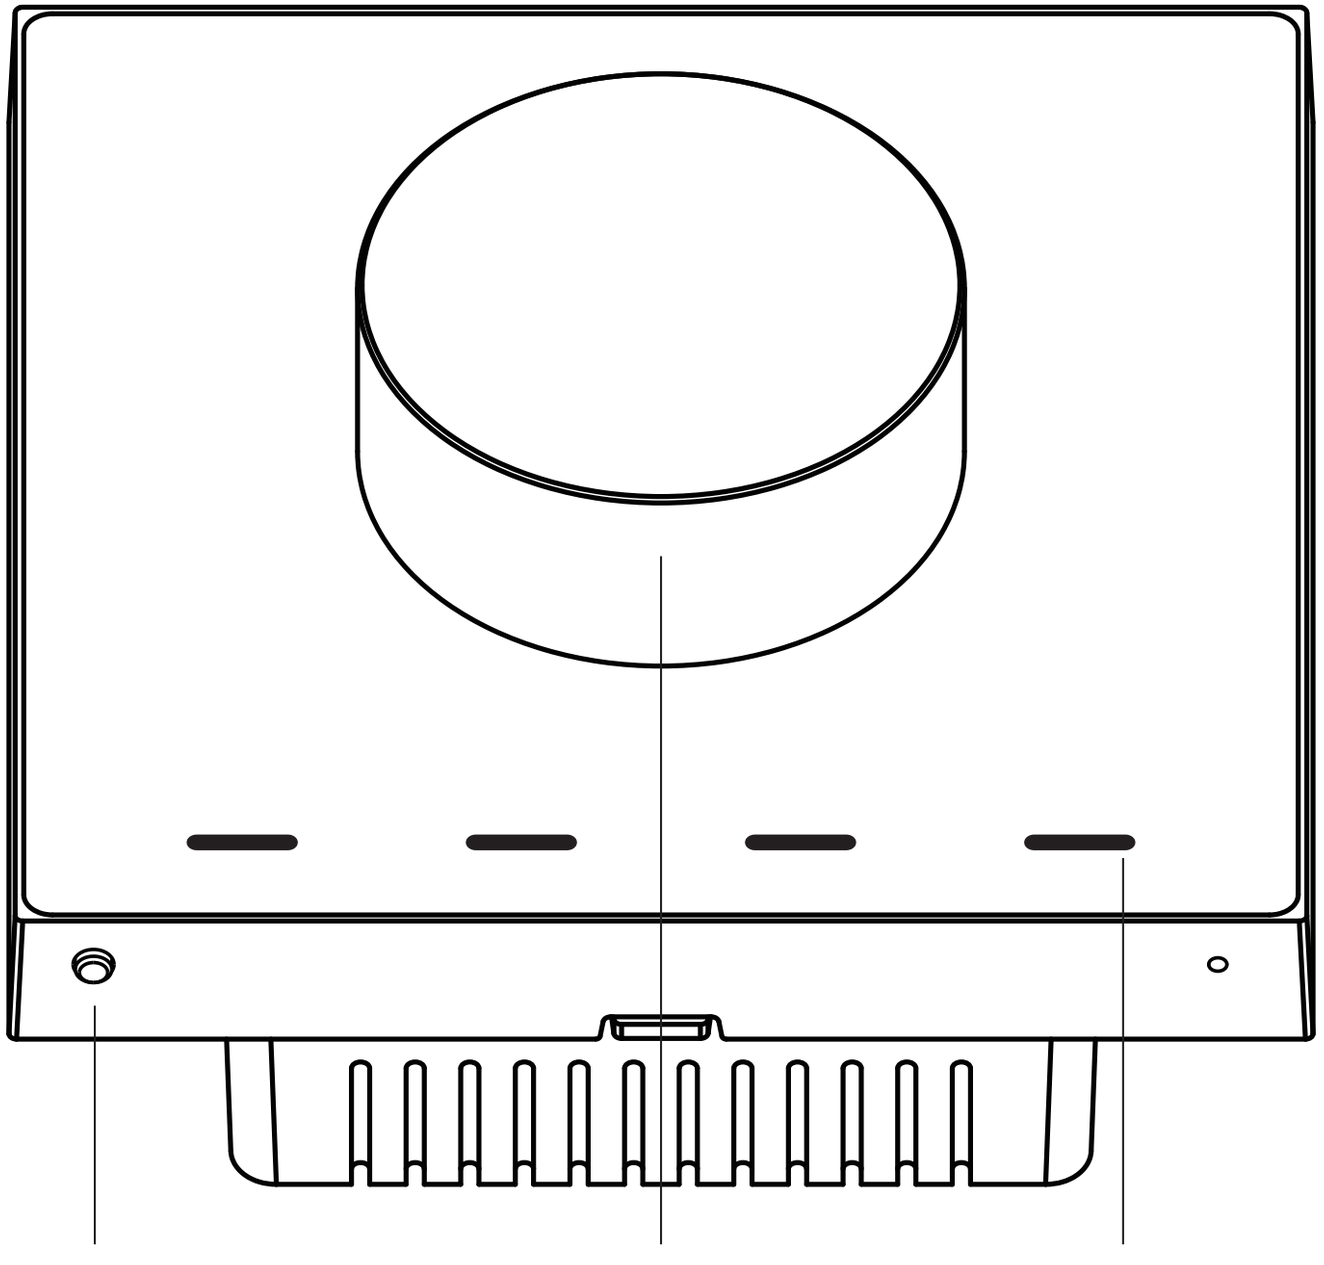

配对按钮

长按10秒清除用户设置

长按20秒解绑恢复出厂

调光旋钮

旋转调节亮度

按下并旋转调节色温

触摸按钮x4

产品介绍

LifeSmart 星玉调光开关 (0-10V) 是一款 86 型入墙调光面板，采用 0-10V 调光方案，支持旋钮调光和四个可自定义场景的触摸按钮，是一款多功能调光面板。

外观造型延续 LifeSmart 星玉系列的现代简约风格，采用阳极氧化铝材质旋钮，搭配钢化玻璃面板，赋予您更加丝滑的触感体验。

配对到智慧中心使用，您可以随时随地通过手机查看并控制调光灯具的开关、亮度和色温，一键执行四个智能场景，并与其他智能设备（如动态感应器，智慧插座等）形成联动。

规格参数

尺寸	露出墙外尺寸: 86*86*28mm 整机尺寸: 86*86*53mm
重量	145g
静态功率	<0.6W
输入	220V~ 50/60Hz
最大负载	500W (L out)
无线协议	CoSS
无线距离	200m (开放场)
工作温度	-5~45°C
工作湿度	5~90%

安装方法

DIM:　接调光驱动DIM+


CCT:　接调光驱动CCT+

GND:　接调光驱动DIM-

L out:　电源输出

L in:　接入的火线

N:　　接入的零线

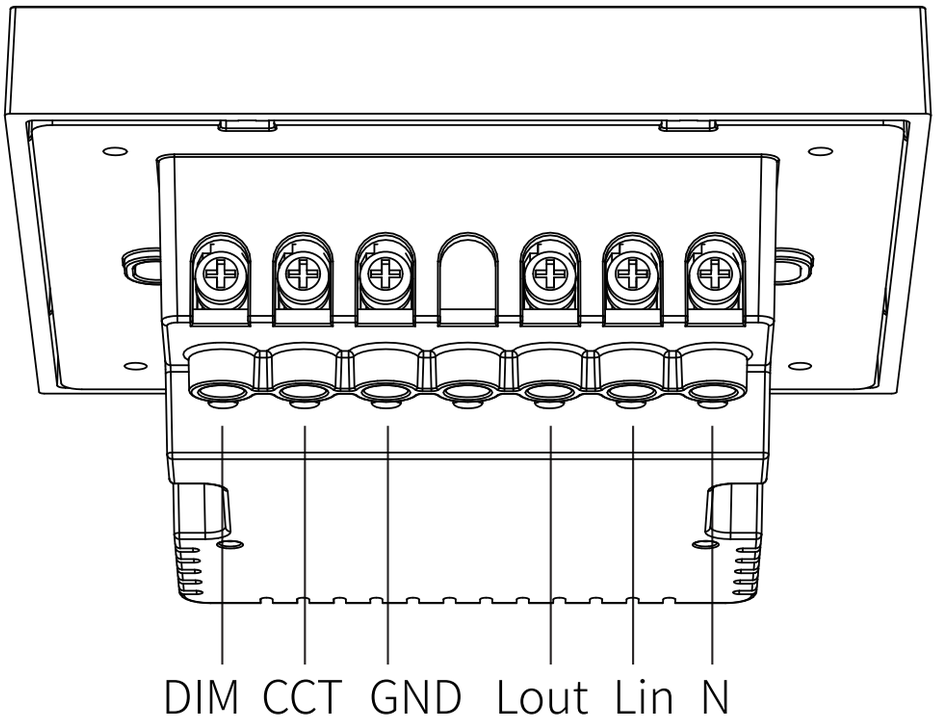

注意：

本产品的面盖、底座须配套使用，请勿拆分后用于其他产品。

建议安装高度不超过2米。

本产品实际安装使用时，需在工作回路上配有相应规格的过电流保护装置(如带过电流保护的剩余电流动作断路器)，将故障电流限制在10A以内。

本产品的面盖、底座须配套使用，请勿拆分后用于其他产品。

警告：

因为安装涉及到强电，务必请专业电工操作 。

安装方法

① 切断安装处的电源，确认所接电线未带电。


② 取出智能控制底部套件，进行接线。

③ 将安装的电线有序地理进开关底盒，安放好底部套件，并使用左右两侧的螺丝固定。

④ 取出开关面板，将面板扣到底部套件上， 确认上、下各两个卡扣到位，否则可能因为接触不良无法正常使用。

⑤ 打开安装处的电源，设备自动开启。

⑥ 配置好智慧中心，在 LifeSmart App 中点击“添加新设备”，选择“星玉调光开关”，参照 App 提示进行操作并完成配对。

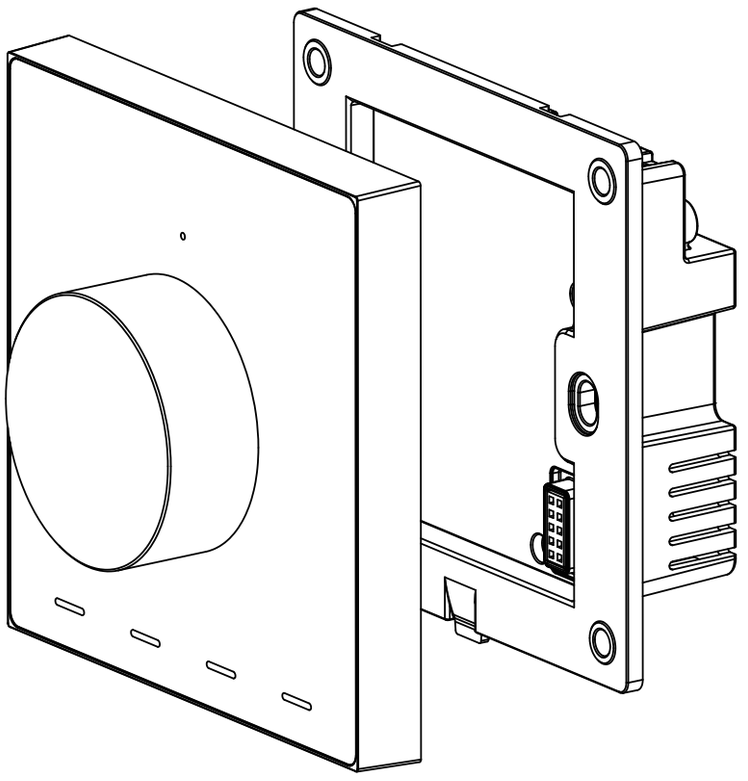

* 产品外观请以实物为准

声明

由于产品版本升级或其他原因，本手册内容有可能变更。我们公司保留在没有任何通知或者提示的情况下对本手册的内容进行修改的权利。本手册仅作为使用指导，我们尽全力在本手册中提供准确的信息，但是我们并不确保手册内容完全没有错误，本手册中的所有陈述、信息和建议也不构成任何明示或暗示的担保。

如需要获取最新手册，请登录 **www.ilifesmart.com**

LifeSmart为杭州行至云起科技有限公司的商标。对于本手册中出现的其它公司的商标、产品标识及商品名称，由各自权利人拥有。未经本公司书面许可，任何单位和个人不得擅自摘抄、复制本书内容的部分或全部，并不得以任何形式传播。

技术支持

技术支持电话
400-886-1911

技术支持微信公众号
iLifeSmart

用户支持邮箱
support@ilifesmart.com

网址
www.ilifesmart.com

制造商: 杭州行至云起科技有限公司
地址: 杭州市萧山区平澜路518号悦盛国际中心22楼

保修说明

感谢您购买LifeSmart产品。为了保障您的权益，请仔细阅读以下内容：根据国家三包政策规定，本公司的产品保修期为一年（自购买之日起计算，无法核实购买日期的，以出厂日期为准）。 在保修期内，凡属于正常使用情况下产品本身质量问题引起的故障本公司将给予免费保修。寄送保修前您可以拨打 400-886-1911 与我们的售后人员取得联系。

保修说明

凡有以下情况之一者，不属于免费保修范围。

- 未按照使用说明书要求安装、使用、维护、保管导致的产品故障或损害的；
- 已经超出保修期限的；
- 擅自涂改、撕毁产品条形码；
- 擅自改动本身固有的配置文件或擅自拆机修理；
- 人为导致产品损害，例如输入不合适电压，高温，进水，机械损坏，摔坏，产品严重氧化或生锈等；
- 因不可抗拒力如地震、火灾、水灾、电击等导致的产品故障或损坏；
- 其他非产品本身设计、技术、制造、质量等问题而导致的故障或损坏。

杭州行至云起科技有限公司及其许可者版权所有，保留一切权利。 P/N 88012170 A0

LifeSmart


Nature Dimmer

(0-10V)

User Guide V1.0

Model: LS220-DW2/DG2/DF2 etc.

ILLUSTRATION

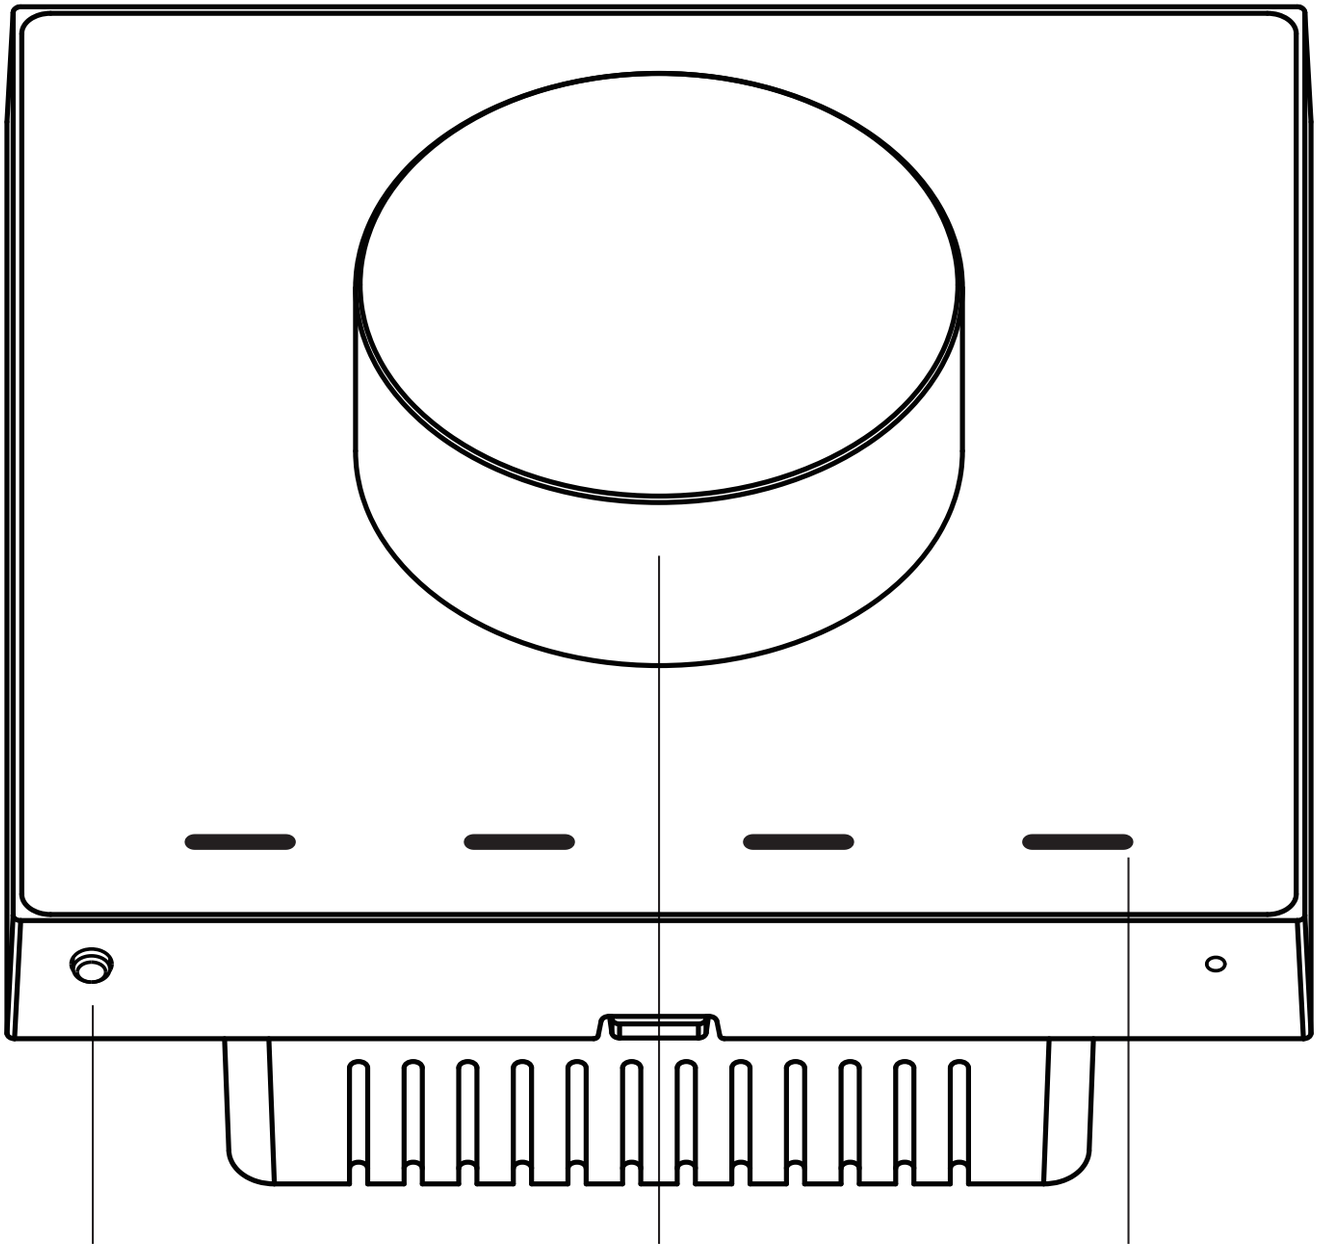

Pair button

Press 10s to clear user settings

Press 20s to unpair & restore factory

Dimming knob

Rotate to adjust brightness

Press and rotate to adjust color temperature

Touch button x 4

INSTRUCTION

The LifeSmart Nature Dimmer (0-10V) is an 86-type wall-mounted multifunctional dimming panel with 0-10V dimming scheme, supports knob dimming and four touch buttons that can customize scenes.


The appearance continues the modern and simple style of the LifeSmart Nature series, with anodized aluminum knobs and tempered glass panels, giving you a smoother tactile experience.


After paired to the LifeSmart Smart Station, you can view and control the ON/OFF, brightness and color temperature of dimming lamps through your mobile phone anytime, anywhere, execute four smart scenarios with one key, and form linkage with other smart devices (such as motion sensors, smart sockets, etc.).

SPECIFICATIONS

Size	Outside the wall: 86*86*28mm Overall: 86*86*53mm
Weight	145g
Power consumption	<0.6W
Input	AC 100-240V 50/60Hz
Maximum load	500W (L out)
Wireless protocol	CoSS
Wireless distance	200m(open field)
Operating temperature	-5~45°C
Operating humidity	5~90%

WIRING INSTRUCTION

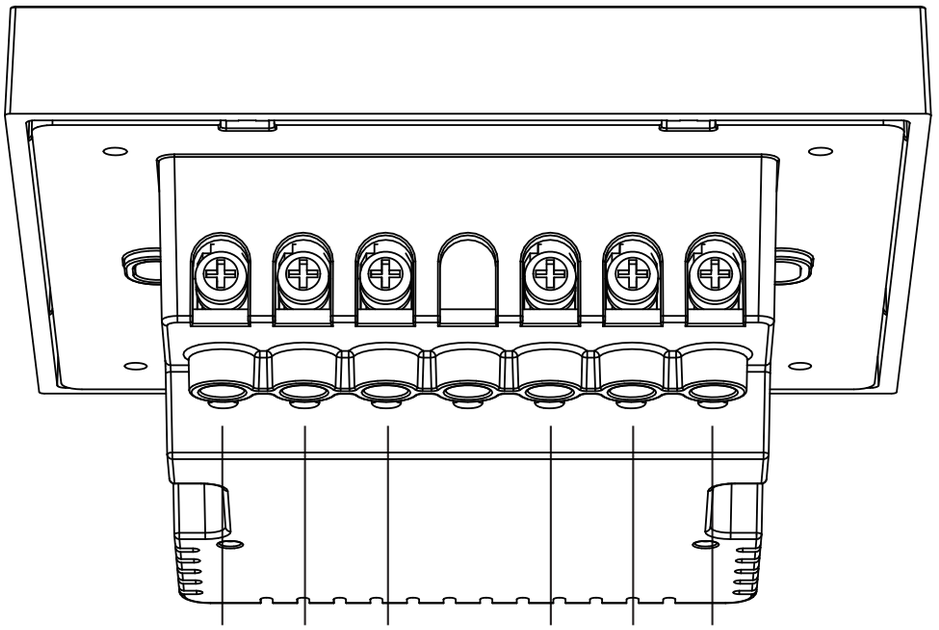

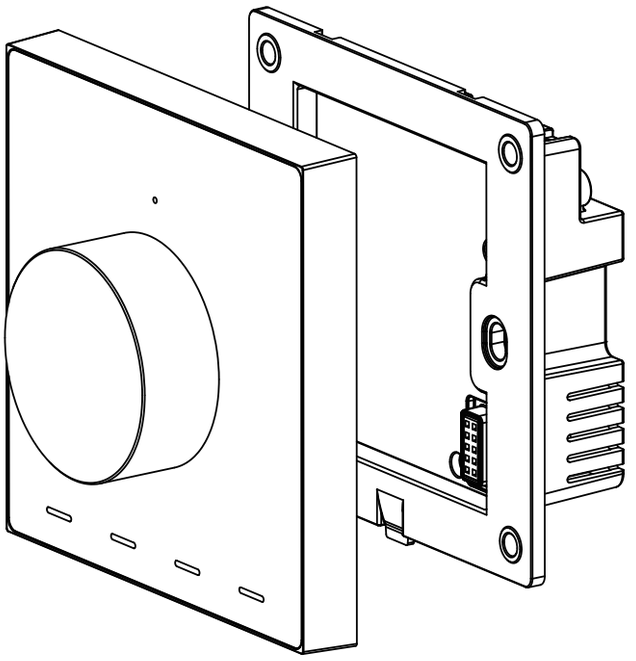

DIM: Connect to dimming driver DIM+

CCT: Connect to dimming driver CCT

GND: Connect to dimming driver DIM-

L out: Switch-out Live Wire

L in: Switch-in Live Wire

N: Switch-in Neutral Wire

NOTE:

The panel and accessory of this product must be used together, do not separate and use them for other products.

It is recommended that the installation height does not exceed 2 meters.

The installation involves high voltage and should be done by a professional electrician.

INSTALLATION

① Cut off the electrical power supply and make sure the wiring is not charged.

② Take out the smart control accessory and install it according to the wiring instruction, make sure all the wires are placed firmly.

③ Place the wires in the cassette orderly, and fix the smart control accessory to the cassette with fixing screws.

④ Take out the switch panel and fix it to smart control accessory, make sure that the upper and lower two buckles are in place, otherwise it may not be able to be used normally due to poor contact.

⑤ Restore the power supply, the device will turns on automatically.

⑥ After configuration of the Smart Station, choose "**Add Device**" in LifeSmart App, select "**Nature Dimmer**" to enter pairing process. Follow the instruction on the app to finish pairing.

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

User support e-mail address

support@ilifesmart.com

Website

iot.ilifesmart.com

Manufacturer: HANGZHOU LIFESMART TECHNOLOGY CO.,LTD.
Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart APP and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

http://global.ilifesmart.com/ce/docs/

CE

Notice: This device may be used in each member state in EU.

DISPOSAL AND RECYCLE INFORMATION



Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.

Facebook: ilifesmarthome Twitter: ilifesmarthome

Copyright © 2022 LifeSmart Inc. All Rights Reserved.