LifeSmart云起

超能面板™

超能面板 / 超能面板 S

Nature Mini / Nature Mini S


Setting up your LifeSmart Nature

使用说明书 V1.0

User Guide V1.0

Model: LS228/LS248 series

部件说明 ILLUSTRATION

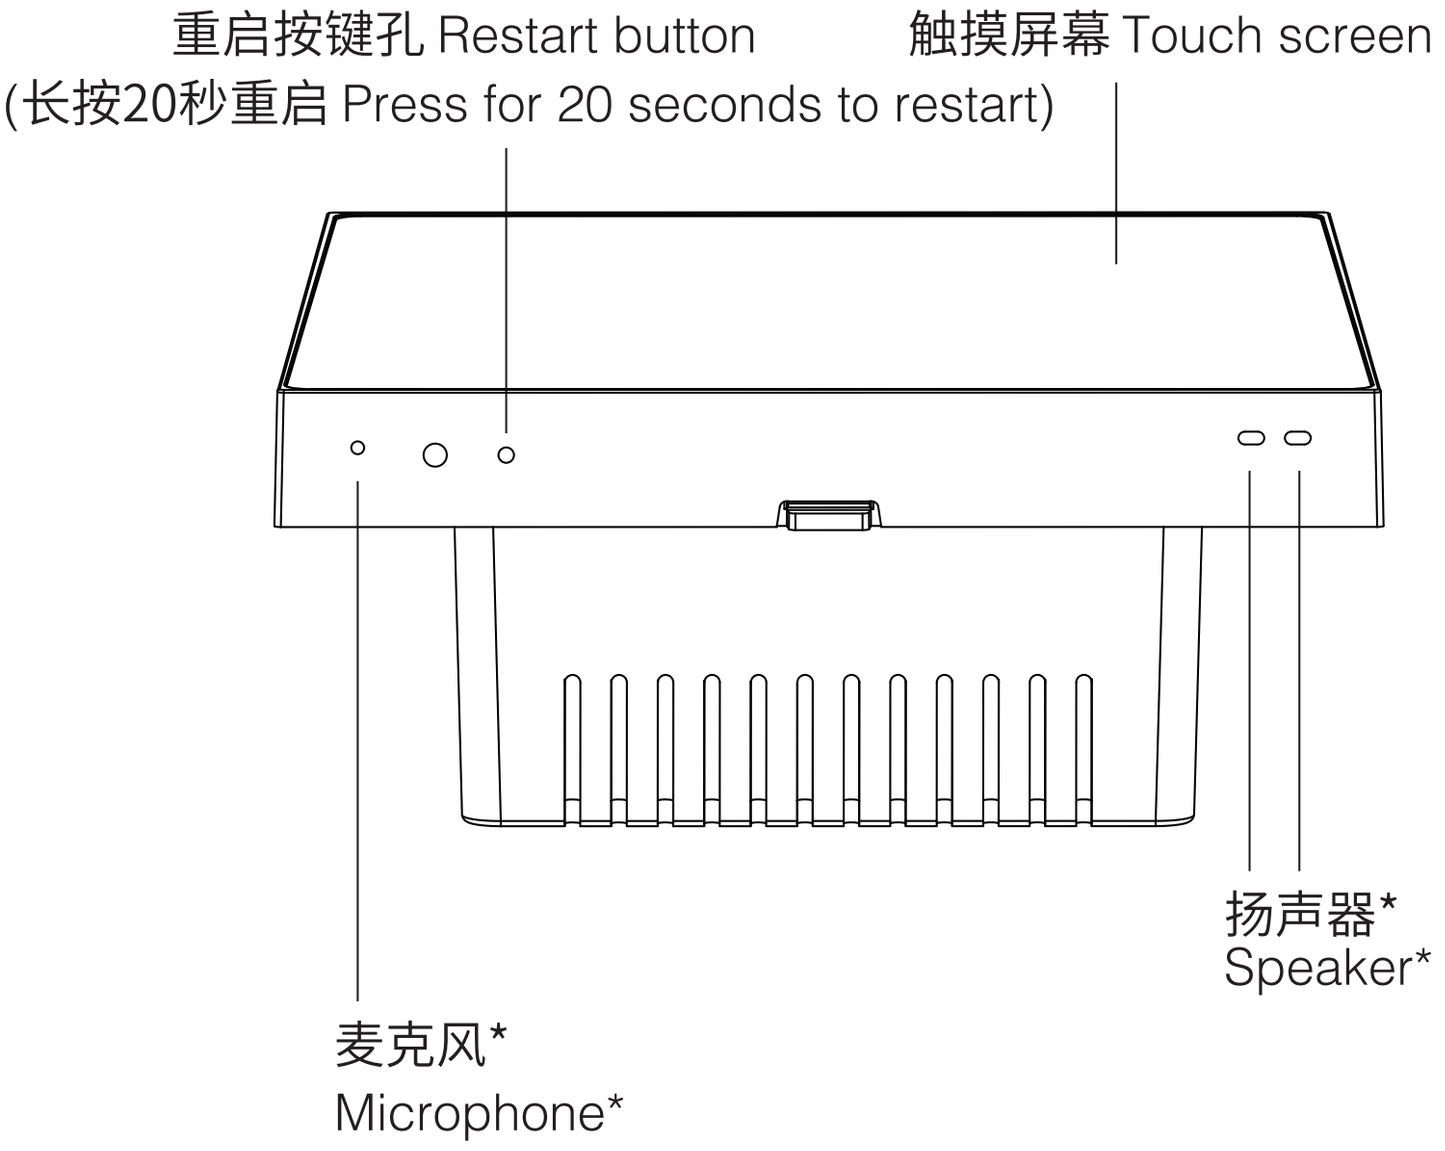

注意 NOTE:

- 部分型号选配麦克风，请以实物为准
  The microphone of some models is optional, please refer to the actual product
- 部分型号选配扬声器，请以实物为准
  The speaker of some models is optional, please refer to the actual product

产品介绍 INSTRUCTION

超能面板/超能面板S是一款安装于家庭动线交汇处的智能家居控制面板。它采用4寸高清触控屏幕，为您提供更宽广的视觉空间。以标准86底盒尺寸设计，方便您无缝升级。内置智能家居网关，全宅智能方寸尽显。它不但可以作为您的私人智能管家，更具备能够被打造成物业管理终端的拓展能力，使您及时同步物业信息、远程查看来访客人。

Nature Mini/Nature Mini S is a smart home control panel installed at the intersection of moving paths in your home. It has a 4-inch HD touch screen to provide you with a wide visual space and a comfortable interaction experience.

With a powerful hardware platform to support multi-mode protocols and a customized operating system, it can transmit control signals to smart home devices and receive status feedback, thus realizing control functions of smart devices such as turning off lights and opening curtains.

规格参数

	超能面板 S	超能面板
系统	Android	Linux
触摸屏	480P/720P*	480P
通信协议	Wi-Fi、CoSS、蓝牙	Wi-Fi、CoSS
通信频率	2.4GHz/433MHz GFSK	
通信距离	200米（开放场）	
尺寸	露出墙外尺寸:86*86*11mm 整机尺寸:86*86*36mm	
工作温度	-5~45°C	
工作湿度	5~90%	
电源输入	AC 100-240V 50/60Hz	
负载	单路阻性负载最大500W 单路感性、容性负载最大200W	

- 高清版屏幕分辨率为720P

SPECIFICATIONS

	Nature Mini S	Nature Mini
Operation System	Android	Linux
Screen resolution	480x480 / 720x720*	480x480
Wireless protocol	Wi-Fi, CoSS, Bluetooth	Wi-Fi, CoSS
Wireless frequency	2.4GHz/433MHz GFSK	
Wireless distance	200m (open field)	
Product size	Outside the wall: 86*86*11mm Overall: 86*86*36mm	
Working temperature	-5~45°C	
Working humidity	5~90%	
Input	AC 100-240V 50/60Hz	
Load	Resistive Load: 500W per channel. Inductive/Capacitive Load: 200W per channel.	

- Only the HD version of Nature Mini S provides 720x720 resolution

安装方法 WIRING INSTRUCTION


L3: 接出的第三路火线
Switch-out Live Wire 3

L2: 接出的第二路火线
Switch-out Live Wire 2

L1: 接出的第一路火线
Switch-out Live Wire 1

L: 接入的火线
Switch-in Live Wire

N: 接入的零线
Switch-in Neutral Wire

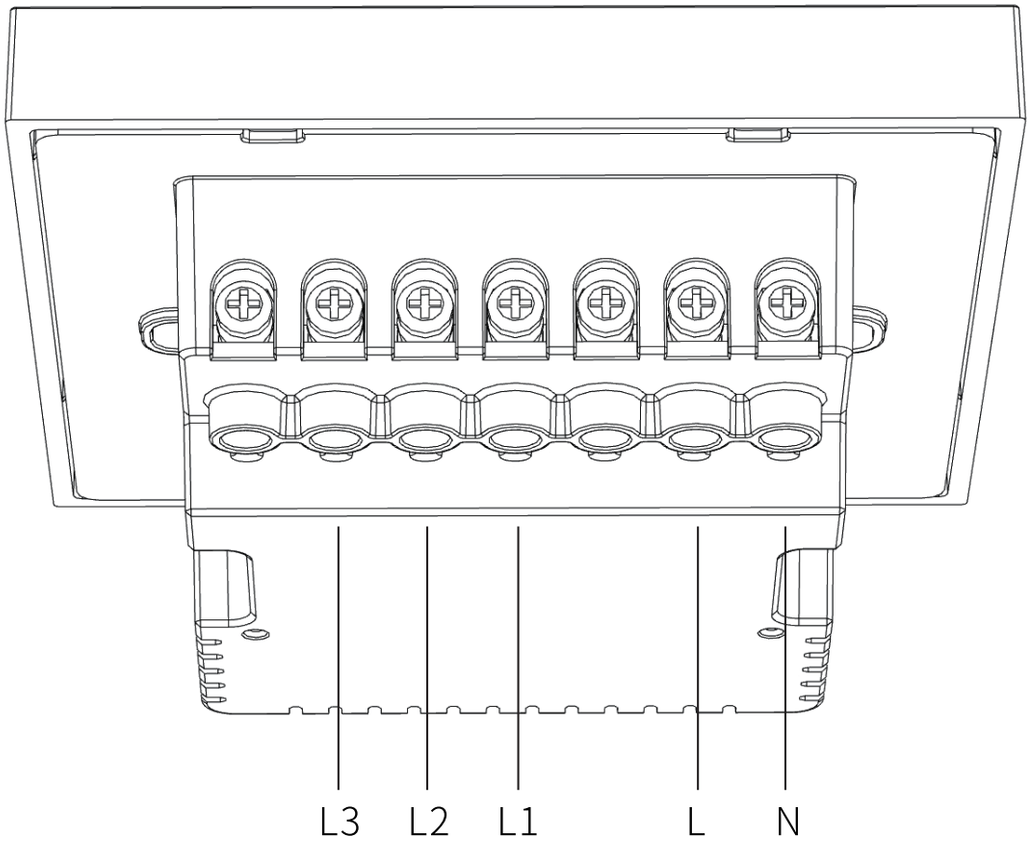

注意 NOTE: 接出线路数量根据不同的底部套件而变化，请以实物为准

The number of output lines varies according to different smart control accessories, please refer tothe actual product.

警告 WARNING: 因为安装涉及到强电，务必请专业电工操作

The installation involves high voltage and should be done by a professional electrician.

安装方法

① 切断安装处的电源，确认所接电线未带电。

② 取出智能控制底部套件，进行接线。


③ 为了安全起见，建议在固定电线的螺丝上贴一层绝缘胶布，确保零线和火线不会存在交叉，以防短路。尤其对安装在金属底盒里面的底部套件，请务必确保固定电线的螺丝未触碰到底盒。

④ 将安装的电线有序地理进开关底盒，安放好底部套件，并使用左右两侧的螺丝固定。

⑤ 取出屏幕套件，将面板扣到底部套件上，确认上、下各两个卡扣到位，否则可能因为接触不良无法正常使用。

安装方法

⑥　打开安装处的电源，设备自动开启。

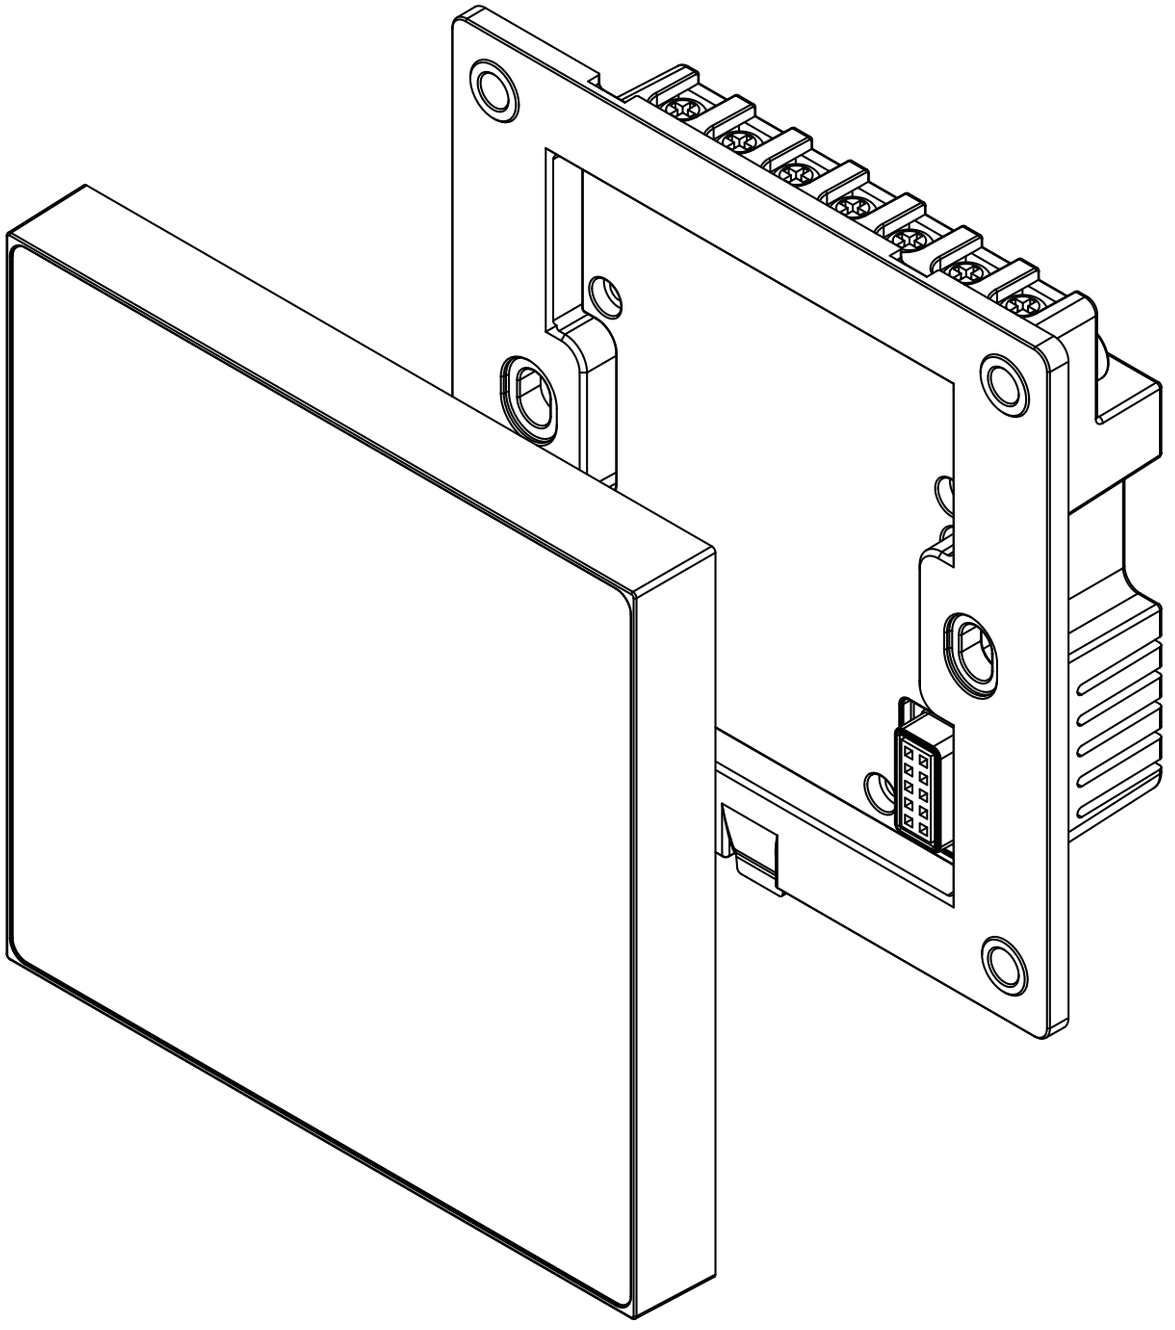

INSTALLATION

① Cut off the electrical power supply and make sure the wiring is not charged.


② Take out the smart control accessory and install it according to the wiring instruction, make sure all the wires are placed firmly.

③ For safety reasons, it is recommended to put a layer of insulating tape on the screws that fix the wires to ensure that there is no contact between the neutral and live wires to prevent short circuits. Especially for the smart control accessory installed inside the metal cassette, make sure that the screws that hold the wires do not touch the cassette.

④ Place the wires in the cassette orderly, and fix the smart control accessory to the cassette with fixing screws.

⑤ Take out the smart control panel and fix it to smart control accessory, make sure that the upper and lower two buckles are in place, otherwise it may not be able to be used normally due to poor contact.

⑥ Restore the power supply, the device will turns on automatically.

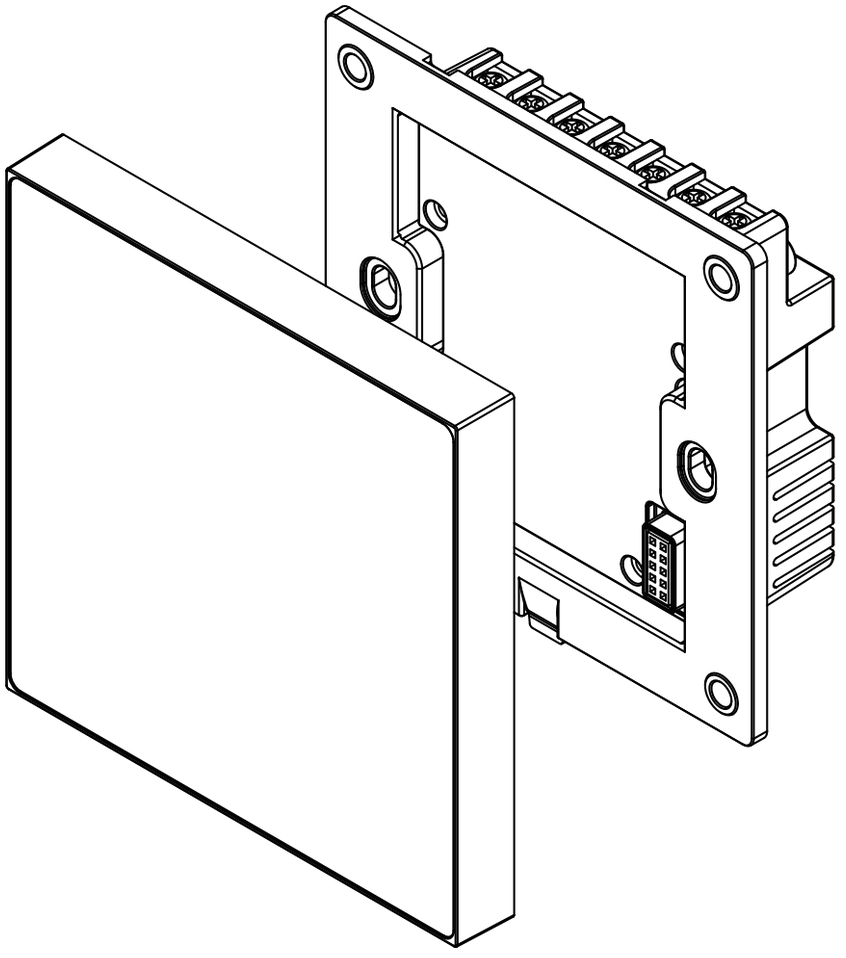

声明

由于产品版本升级或其他原因，本手册内容有可能变更。我们公司保留在没有任何通知或者提示的情况下对本手册的内容进行修改的权利。本手册仅作为使用指导，我们尽全力在本手册中提供准确的信息，但是我们并不确保手册内容完全没有错误，本手册中的所有陈述、信息和建议也不构成任何明示或暗示的担保。

如需要获取最新手册，请登录 **www.ilifesmart.com**

LifeSmart为杭州行至云起科技有限公司的商标。对于本手册中出现的其它公司的商标、产品标识及商品名称，由各自权利人拥有。未经本公司书面许可，任何单位和个人不得擅自摘抄、复制本书内容的部分或全部，并不得以任何形式传播。

技术支持

技术支持电话
400-886-1911

技术支持微信公众号
iLifeSmart

用户支持邮箱
support@ilifesmart.com

网址
www.ilifesmart.com

制造商: 杭州行至云起科技有限公司
地址: 杭州市萧山区平澜路518号悦盛国际中心22楼

保修说明

感谢您购买LifeSmart产品。为了保障您的权益，请仔细阅读以下内容：根据国家三包政策规定，本公司的产品保修期为一年（自购买之日起计算，无法核实购买日期的，以出厂日期为准）。 在保修期内，凡属于正常使用情况下产品本身质量问题引起的故障本公司将给予免费保修。寄送保修前您可以拨打 400-886-1911 与我们的售后人员取得联系。

保修说明

凡有以下情况之一者，不属于免费保修范围。

- 未按照使用说明书要求安装、使用、维护、保管导致的产品故障或损害的；
- 已经超出保修期限的；
- 擅自涂改、撕毁产品条形码；
- 擅自改动本身固有的配置文件或擅自拆机修理；
- 人为导致产品损害，例如输入不合适电压，高温，进水，机械损坏，摔坏，产品严重氧化或生锈等；
- 因不可抗拒力如地震、火灾、水灾、电击等导致的产品故障或损坏；
- 其他非产品本身设计、技术、制造、质量等问题而导致的故障或损坏。

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

User support e-mail address

support@ilifesmart.com

Website

iot.ilifesmart.com

Manufacturer: HANGZHOU LIFESMART TECHNOLOGY CO.,LTD.

Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart APP and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

http://global.ilifesmart.com/ce/docs/

CE

Notice: This device may be used in each member state in EU.

Facebook: ilifesmarthome Twitter: ilifesmarthome

Copyright © 2021 LifeSmart Inc. All Rights Reserved.

杭州行至云起科技有限公司及其许可者版权所有，保留一切权利。

P/N 88007050 A6